

CLIK COB 100÷240V-AC

IP65

20W - 2600Lm

6.000°K - 40.000h

RoHS RAEE CONFORMITY



Snodi dotati di galletto per comodità di bloccaggio
Joints equipped with wing nut for comfort clamping



Interruttore ergonomico on/off
Ergonomic on/off switch




cavo con spina Schuko
cabble with Schuko plug

CARATTERISTICHE

Fino all'85% di risparmio energetico
Basso calore
Zero manutenzione
Testa orientabile in alluminio estruso con vetro ad alta resistenza
Bracci facilmente regolabili
Resistente ai lubro-refrigeranti
Direttive 2006/95/CE, 2004/108/CE e 2006/42/CE come previsto dalla Normativa UNI EN 1837

FEATURES

*Up to 85% energy saving
Low performing heat
Zero maintenance
Adjustable extruded aluminium head with high resistance glass
Easily adjustable arms
Resistant to coolants and lubricants
Complies with Directives 2006/95/EC, 2004/108/EC and 2006/42/EC as required by Normative UNI EN 1837*

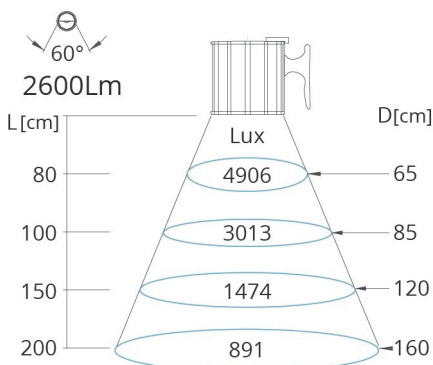

CLIK COB 100÷240V-AC - 20W - IP65



100÷240V-AC

Alimentazione:

100÷240V-AC con alimentatore integrato nella base e cavo con spina Schuko

Voltage:

100÷240V-AC with LED driver built-in the base and cable with Schuko plug

Standard:

Modulo Led con angolo 60°

Standard:

60° LED Module

Accessori opzionali:

morsetti, staffa di fissaggio

Optional Accessories:

clamps, angle plate.

100÷240V AC	ART.	CODE	VIN	WxLed	cable.mt	Kg
	CN20 L60-S-100÷240V-AC	10.01.1.60.20.3	100÷240V AC	20WX1	1,80	2,3

100÷240V AC	ART.	CODE	VIN	WxLed	cable.mt	Kg
	CN20 L60-M2-100÷240V-AC	10.02.1.60.20.3	100÷240V AC	20WX1	1,80	2,4

100÷240V AC	ART.	CODE	VIN	WxLed	cable.mt	Kg
	CN20 L60-L2-100÷240V-AC	10.03.1.60.20.3	100÷240V AC	20Wx1	1,80	2,8

RICAMBI STANDARD E OPTIONAL STANDARD AND OPTIONAL SPARE PARTS

SCATOLA MADRE MASTER BOX

	CLAMP	ANGLE PLATE	NEUTRAL GLASS
ART CODE	JC 02 00.11.010.1	JL 02 00.11.012.1	FIL 109N 01.07.004.0



Qty: 6 pcs
Dimensions: 32x50x52 cm
Weight: 16/20 Kg