

# WIDE T 24V-AC/DC

IP67


28W - 2690Lm

5.600 - 6.000°K - 40.000h

RoHS RAEE CONFORMITY



Snodi dotati di galletto per comodità di bloccaggio  
*Joints equipped with wing nut for comfort clamping*




cavo senza spina  
*cabl e without plug*

## CARATTERISTICHE

Fino all'85% di risparmio energetico  
Basso calore  
Zero manutenzione  
Struttura in alluminio  
Dotata di vetro ad alta resistenza e griglia di lenti anti-irritazione per gli occhi  
Resistente ai lubro-refrigeranti  
Direttive 2006/95/CE, 2004/108/CE e 2006/42/CE come previsto dalla Normativa UNI EN 1837

## FEATURES

*Up to 85% energy saving  
Low performing heat  
Zero maintenance  
Aluminium structure  
Equipped with high resistance glass and anti-irritation lens grid  
Resistant to coolants and lubricants  
Complies with Directives 2006/95/EC, 2004/108/EC and 2006/42/EC as required by Normative UNI EN 1837*

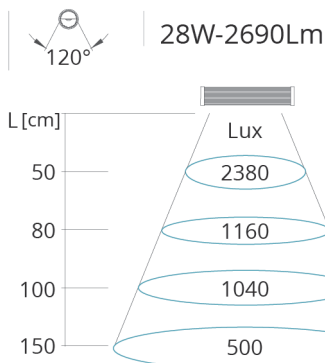

# WIDE T 24V-AC/DC - 28W - IP67




**Standard:**

- Uscita del cavo lato laterale della base
- Modulo Led con angolo 120°

**Standard:**

- Wire outlet from side
- 120° LEDs Module


24V-AC/DC	ART.	CODE	VIN	WxLed	cable.mt	Kg
	T-28W-24V-AC/DC	12.04.2.12.28.3	24V-AC/DC	14wx2	1,80	1,5

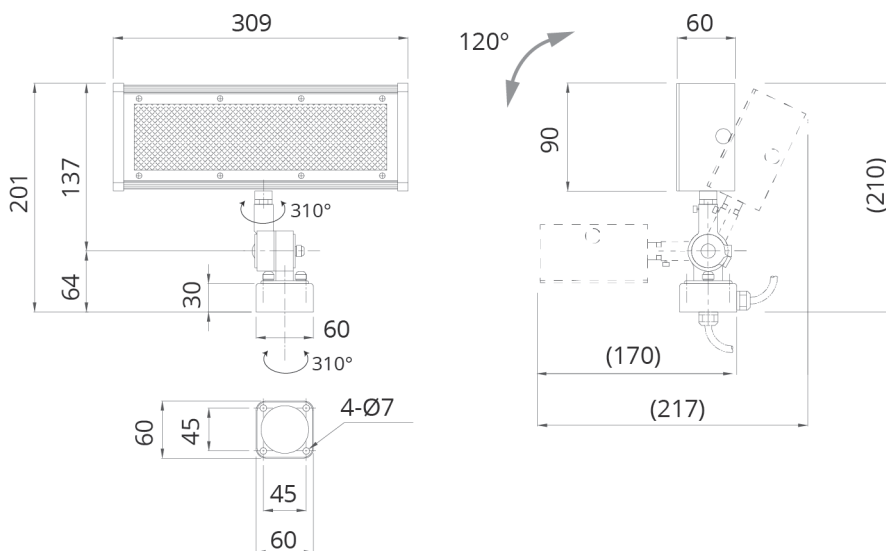

24V-AC/DC

**RICAMBI STANDARD E OPTIONAL  
STANDARD AND OPTIONAL SPARE PARTS**

**ANGLE  
PLATE**



ART JL 01  
CODE 01.11.020.1

**SCATOLA MADRE  
MASTER BOX**



Qty: 5 pcs  
Dimensions: 63x46x26 cm  
Weight: 12 Kg

THE DATA ARE NOT BINDING AND CAN BE CHANGED WITHOUT ADVANCE NOTICE.



NIK LIGHT Srls  
Office: via Carnia, 2 - 20015 Parabiago (MI) - info@niklight.it - tel. +39 0331 490964  
Export Dept: info@eig-group.it - Tel +39 0233103673 - Fax +39 02312337

rev. 02/2018  
pag.43